

CU Series (Low ESR Type)

Features

Low ESR & High Q in use of Cu inner electrode

Application

- Telecommunication
- High frequency module

Capacitance Range


Size (mm)	CU05	
Temperature Characteristics	CΔ	
Rated Voltage (VDC)	25	
Capacitance (pF)	A	
R10		0.1
R50		0.5
1R0		1.0
1R5		1.5
		2.0
		3.0
		4.0
		5.0
		6.0
		7.0
		8.0
		9.0
100		10
120		12
		15
		18
		22
		27
		33
	39	
	47	
	56	
	68	
	82	
101	100	

Thickness and standard package quantity

Size	05
Thickness (t) (mm)	B 0.5±0.05
Taping(180 dia reel)	10kp(P8)
Taping(330 dia reel)	50kp(P8)

Taping denotes the quantity packaged per reel(kp means 1000pcs).P8 denotes 8-mm width plastic tape.

ESR Characteristics (0402)

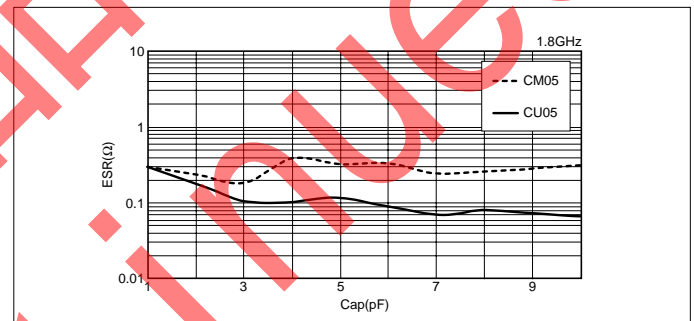

停止生产
 Discontinued Product