

SAW Clock Oscillators Surface Mount Type KC7050S-C1 Series (FSO-2B Series)



CMOS/ 1.8V/ 7.0×5.0mm



Ph Free

RoHS Compliant

Features

- Low voltage 1.8V
- Low jitter
- LV-CMOS output
- Operation at fundamental high frequency

Table 1

Freq. Tol. Code	× 10 ⁻⁶	Operating Temperature Range (°C)	Note
1	± 100	0 to +70	Standard specifications

How to Order

KC7050S 155.520 C 1 1 B 00
① ② ③ ④ ⑤ ⑥ ⑦

- ① Type (7.0×5.0mm SMD)
- ② Output Frequency
- ③ Output Type (CMOS)
- ④ Supply Voltage (1.8V)
- ⑤ Frequency Tolerance (See Table 1)
- ⑥ Symmetry/ Enable Function (40/ 60%, Stand-by)
- ⑦ Customer Special Model Suffix (STD Specification is "00")

Packaging (Tape & Reel 1000 pcs./ reel)


Specifications

Item	Symbol	Conditions	Min.	Max.	Units
Output Frequency Range	f _o		100	170	MHz
Frequency Tolerance	f _{tol}	Initial tolerance, Operating temperature range, Rated power supply voltage change, Load change, Aging (1 year @ 25°C), Shock and vibration Op. Temp.: 0 to +70°C	-100	+100	×10 ⁻⁶
Storage Temperature Range	T _{stg}		-55	+125	°C
Operating Temperature Range	T _{use}	Standard Specifications	0	+70	°C
Max. Supply Voltage	—		-0.5	+5	V
Supply Voltage	V _{CC}	1.8V	1.62	1.98	V
Current Consumption (Standard Loaded)	I _{CC}		—	50	mA
Symmetry	SYM		40	60	%
Rise/ Fall Time (10% V _{CC} to 90% V _{CC} Standard Loaded)	t _r / t _f		—	2	nS
Low Level Output Voltage	V _{OL}		—	10% V _{CC}	V
High Level Output Voltage	V _{OH}		90% V _{CC}	—	V
Output Load (CMOS)	CL		—	15	pF
Input Voltage Range	V _{IN}		0	V _{CC}	V
Low Level Input Voltage	V _{IL}		—	30% V _{CC}	V
High Level Input Voltage	V _{IH}		70% V _{CC}	—	V
Disable Time	t _{dis}		—	200	nS
Enable Time	t _{ena}		—	2	mS
Start-up Time	t _{str}	@ Minimum operation voltage to be 0 sec.	—	10	mS
Deterministic Jitter (DJ)	DJ			0.2 typ.	pS
1 Sigma Jitter	J _{Sigma}	Measured with Wavecrest DTS-2079 VISI 6.3.1		3 typ.	pS
Peak to Peak Jitter	J _{PK-PK}			20 typ.	pS

Note: All electrical characteristics are defined at the maximum load and operating temperature range.
Please contact us for inquiry about operating temperature range, available frequencies and other conditions.

Dimensions

(Unit: mm)

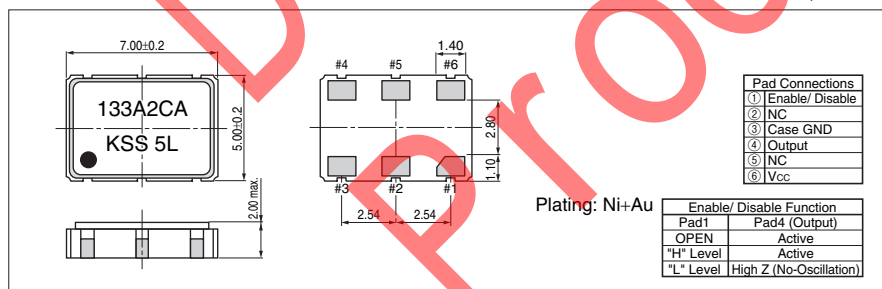

Recommended Land Pattern

(Unit: mm)

