

RoHS Compliant

### Features

- Wide operating voltage range 2.5 to 3.3V
- $\pm 25 \times 10^{-6}$  available
- Highly reliable with seam welding
- Miniature ceramic package
- CMOS output

Table 1

Freq. Tol. Code	Tol. $\times 10^{-6}$	Operating Temperature Range (°C)	Note
0	$\pm 50$	-10 to +70	Standard specifications
S	$\pm 30$		
U	$\pm 25$		
F	$\pm 100$	-40 to +85	With only certain frequencies
G	$\pm 50$		
6	$\pm 50$	-40 to +105	

### How to Order

KC5032A 150.000 C 2 0 E 00  
① ② ③ ④ ⑤ ⑥ ⑦

- ① Type (5.0×3.2mm SMD)
- ② Output Frequency
- ③ Output Type (CMOS)
- ④ Supply Voltage (2.5V, 3.3V Compatible)
- ⑤ Frequency Tolerance (See Table 1)
- ⑥ Symmetry/ INH Function (45/ 55%, Stand-by)
- ⑦ Customer Special Model Suffix (STD Specification is "00")

Packaging (Tape & Reel 1000 pcs./ reel)


### Specifications

Item	Symbol	Conditions	Min.	Max.	Units	
Output Frequency Range	$f_o$	$f_o > 135\text{MHz}$	135	170	MHz	
Frequency Tolerance	$f_{tol}$	Initial tolerance, Operating temperature range, Rated power supply voltage change, Load change, Aging (1 year @25°C), Shock and vibration	Op. Temp.: -40 to +85°C	-100	+100	$\times 10^{-6}$
			Op. Temp.: -10 to +70°C/ -40 to +85°C/ -40 to +105°C	-50	+50	
			Op. Temp.: -10 to +70°C	-30	+30	
			Op. Temp.: -10 to +70°C	-25	+25	
Storage Temperature Range	$T_{stg}$		-55	+125	°C	
Operating Temperature Range	$T_{use}$		-40	+105	°C	
Max. Supply Voltage	—		-0.3	+4.0	V	
Supply Voltage	$V_{CC}$		+2.25	+3.63	V	
Current Consumption (Loaded) (2.25< $V_{CC}$ <2.8V)	$I_{CC}$	135< $f_o$ <150MHz	—	19	mA	
Current Consumption (Loaded) (2.8< $V_{CC}$ <3.63V)		150< $f_o$ <170MHz	—	23		
Stand-by Current		135< $f_o$ <150MHz	—	21		
		150< $f_o$ <170MHz	—	25		
Symmetry	$I_{std}$		—	10	$\mu\text{A}$	
Rise/ Fall Time (10% $V_{CC}$ to 90% $V_{CC}$ Maximum Loaded)	SYM	@50% $V_{CC}$	45	55	%	
Low Level Output Voltage	$t_r / t_f$	2.25≤ $V_{CC}$ ≤2.8V	—	3.0	ns	
		2.8< $V_{CC}$ ≤3.63V	—	2.5		
High Level Output Voltage	$V_{OL}$	$I_{OL} = -4\text{mA}$	—	10% $V_{CC}$	V	
Output Load	$V_{OH}$	$I_{OH} = -4\text{mA}$	90% $V_{CC}$	—	V	
Input Voltage Range	$L_{CMOS}$	2.25≤ $V_{CC}$ ≤3.63V	—	15	pF	
Low Level Input Voltage	$V_{IN}$		0	$V_{CC}$	V	
High Level Input Voltage	$V_{IL}$		—	30% $V_{CC}$	V	
Disable Time	$V_{IH}$		70% $V_{CC}$	—	V	
Enable Time	$t_{dis}$		—	150	ns	
Start-up Time	$t_{ena}$		—	5	ms	
1 Sigma Jitter	$t_{str}$	@Minimum operating voltage to be 0 sec.	—	10	ms	
Peak to Peak Jitter	$J_{\sigma}$	Measured with Wavecrest SIA-3000	—	4	ps	
	$J_{PK-PK}$		—	30	ps	

Note: All electrical characteristics are defined at the maximum load and operating temperature range.  
Please contact us for inquiry about operating temperature range, available frequencies and other conditions.

### Dimensions

(Unit: mm)

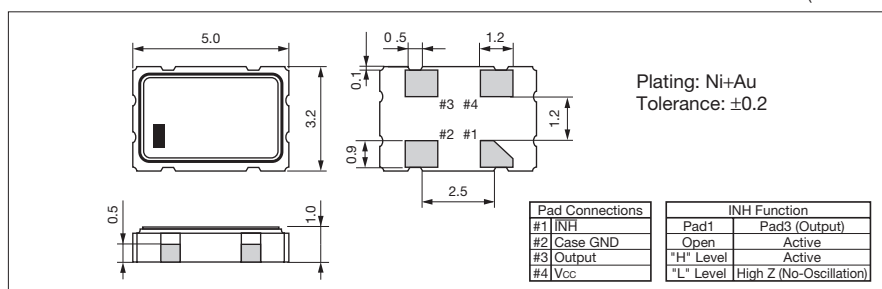

### Recommended Land Pattern

(Unit: mm)

