


LV-PECL/ 3.3V or 2.5V/ 5.0×3.2mm

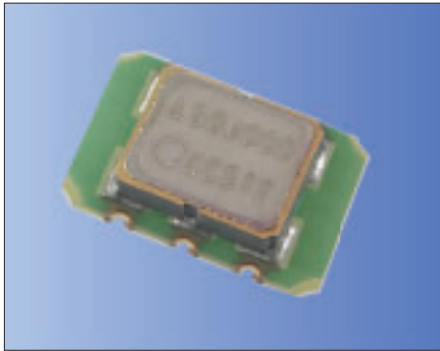

RoHS Compliant

**Features**

- Miniature ceramic package
- Highly reliable with seam welding
- LV-PECL output
- Supply voltage Vcc = 3.3V, 2.5V
- ±25×10<sup>-6</sup> available
- Low Phase Noise

**Table 1**

Freq. Tol. Code	Tolerance × 10 <sup>-6</sup>	Operating Temperature Range (°C)	Note
0	± 50	0 to +70	Standard specifications
S	± 30		
U	± 25		
F	±100	-40 to +85	Please contact us for available frequencies.
G	± 50		
6	± 50	-40 to +105	

**How to Order**

**KC5032L 100.000 P □ G J 00**  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series
- ② Output Frequency
- ③ Output Type (LV-PECL)
- ④ Supply Voltage (3 : 3.3V or 2 : 2.5V)
- ⑤ Frequency Tolerance (See Table 1)
- ⑥ Symmetry/ INH Function (45/ 55%, Stand-by) J: Low Phase Noise
- ⑦ Individual Specification (STD Specification is "00")

Packaging (Tape & Reel 1000 pcs./ reel)

**Specifications**

Item	Symbol	Conditions	Specifications		Units	
			KC5032L-P2	KC5032L-P3		
Output Frequency Range <sup>Note1</sup>	f <sub>o</sub>		25 to 170		MHz	
Frequency Tolerance	f <sub>tol</sub>	Initial tolerance, Operating temperature range, Rated power supply voltage change, Load change, Aging (1 year @25°C), Shock and vibration	±50/ -40 to +105°C		ppm	
			±100/ -40 to +85°C			
			±50/ -40 to +85°C			
			±50/ 0 to +70°C			
			±30/ 0 to +70°C			
Storage Temperature Range	T <sub>stg</sub>		-55 to +125		°C	
Operating Temperature Range	T <sub>use</sub>	Standard Specifications	0 to +70/ -40 to +85		°C	
		Extend (Option)	-40 to +105			
Max. Supply Voltage	—		-0.3 to +4.0		V	
Supply Voltage	V <sub>cc</sub>		+2.25 to +2.75	+2.97 to +3.63	V	
Current Consumption	I <sub>cc</sub>	≤156.25MHz	60 max.		mA	
		156.25MHz<	70 max.			
Stand-by Current	I <sub>std</sub>		20 max.		μA	
Symmetry	SYM	50ohm @crossing point	50±5		%	
Rise/ Fall Time (20% V <sub>cc</sub> to 80% V <sub>cc</sub> Maximum Loaded)	tr/ tf	50ohm	0.6 max. (V <sub>cc</sub> : 2.25 to 2.75V) 0.4 max. (V <sub>cc</sub> : 2.97 to 3.63V)		ns	
Low Level Output Voltage <sup>Note2</sup>	V <sub>OL</sub>		V <sub>cc</sub> -1.810 to V <sub>cc</sub> -1.620		V	
High Level Output Voltage <sup>Note2</sup>	V <sub>OH</sub>		V <sub>cc</sub> -1.025 to V <sub>cc</sub> -0.880		V	
Output Load	RL		50		ohm	
Input Voltage Range	V <sub>IN</sub>		0 to V <sub>cc</sub>		V	
Low Level Input Voltage	V <sub>IL</sub>		30% V <sub>cc</sub> max.		V	
High Level Input Voltage	V <sub>IH</sub>		70% V <sub>cc</sub> min.		V	
Disable Time	t <sub>dis</sub>		150 max.		ns	
Enable Time	t <sub>ena</sub>		10 max.		ms	
Start-up Time	t <sub>str</sub>	@Minimum operating voltage to be 0 sec.	10 max.		ms	
Deterministic Jitter	DJ		2 max.		ps	
1 Sigma Jitter	J <sub>sigma</sub>	Measured with Wavecrest SIA-3000	4 max.		ps	
Peak to Peak Jitter	J <sub>PK-PK</sub>		30 max.		ps	
Phase Jitter	J <sub>Phase</sub>	@156.25MHz V <sub>cc</sub> = 3.3V	BW : 12kHz to 20MHz	0.3max.		ps
Phase Noise	—	@156.25MHz V <sub>cc</sub> = 3.3V	@10Hz offset	Typ. -77		dBc/ Hz
			@100Hz offset	Typ. -103		
			@1kHz offset	Typ. -133		
			@10kHz offset	Typ. -143		
			@100kHz offset	Typ. -149		
			@1MHz offset	Typ. -149		
			@10MHz offset	Typ. -154		


Note : All electrical characteristics are defined at the maximum load and operating temperature range.

Note1: Please contact us for inquiry about operating temperature range, available frequencies and other conditions.

Note2: DC characteristic

**Dimensions**

(Unit: mm)

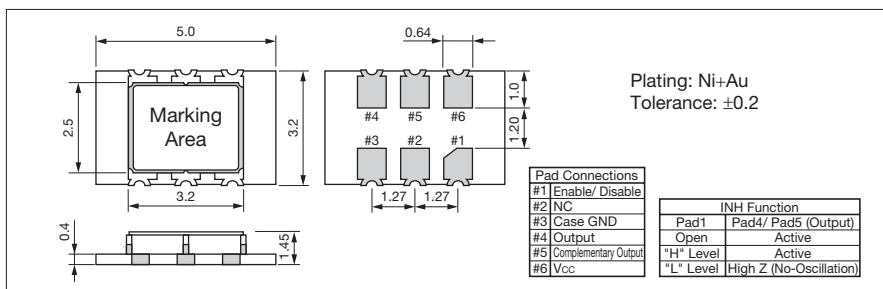

**Recommended Land Pattern**

(Unit: mm)

